



Posterior lip disassembly manual


Product list

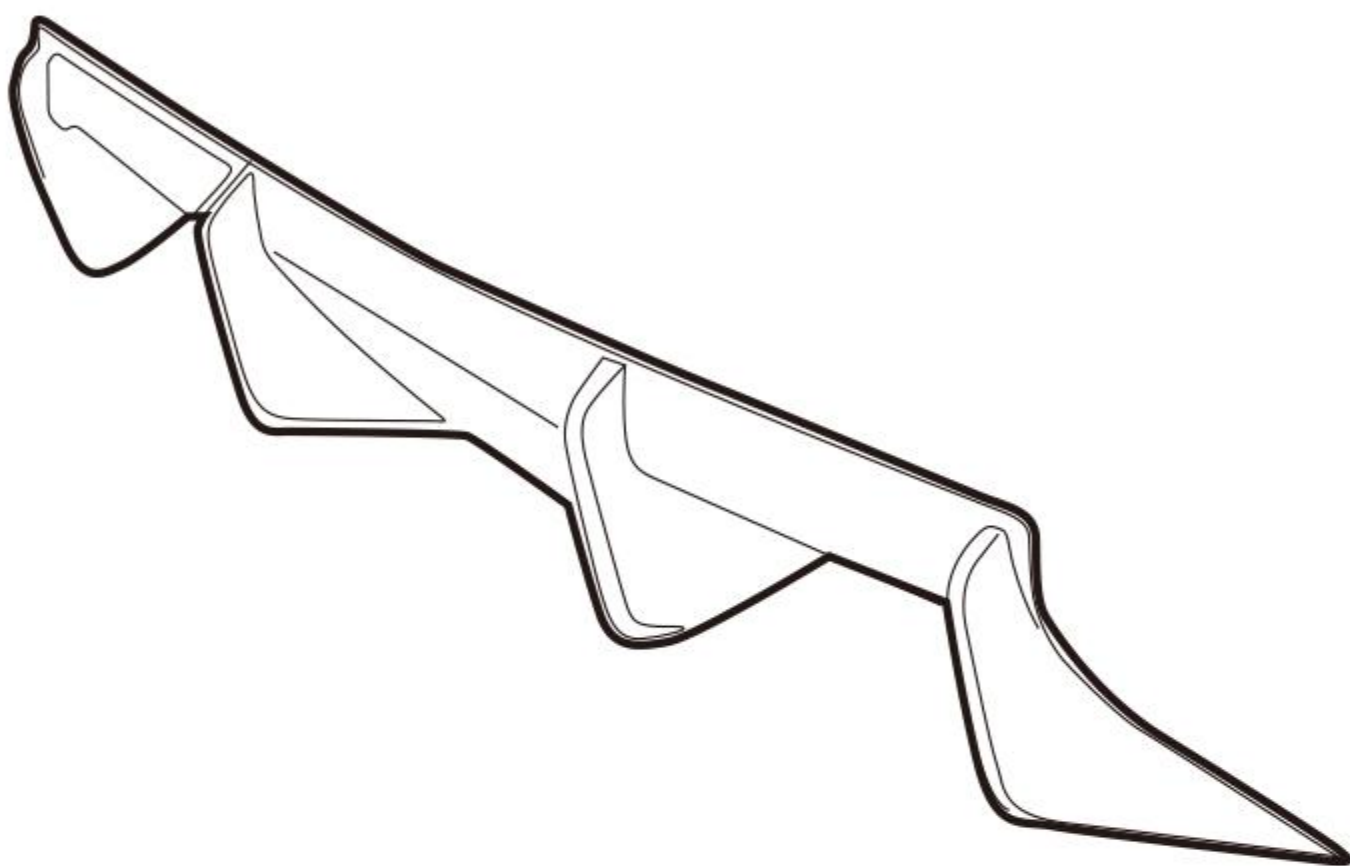

❶X1 Carbon fiber back lip

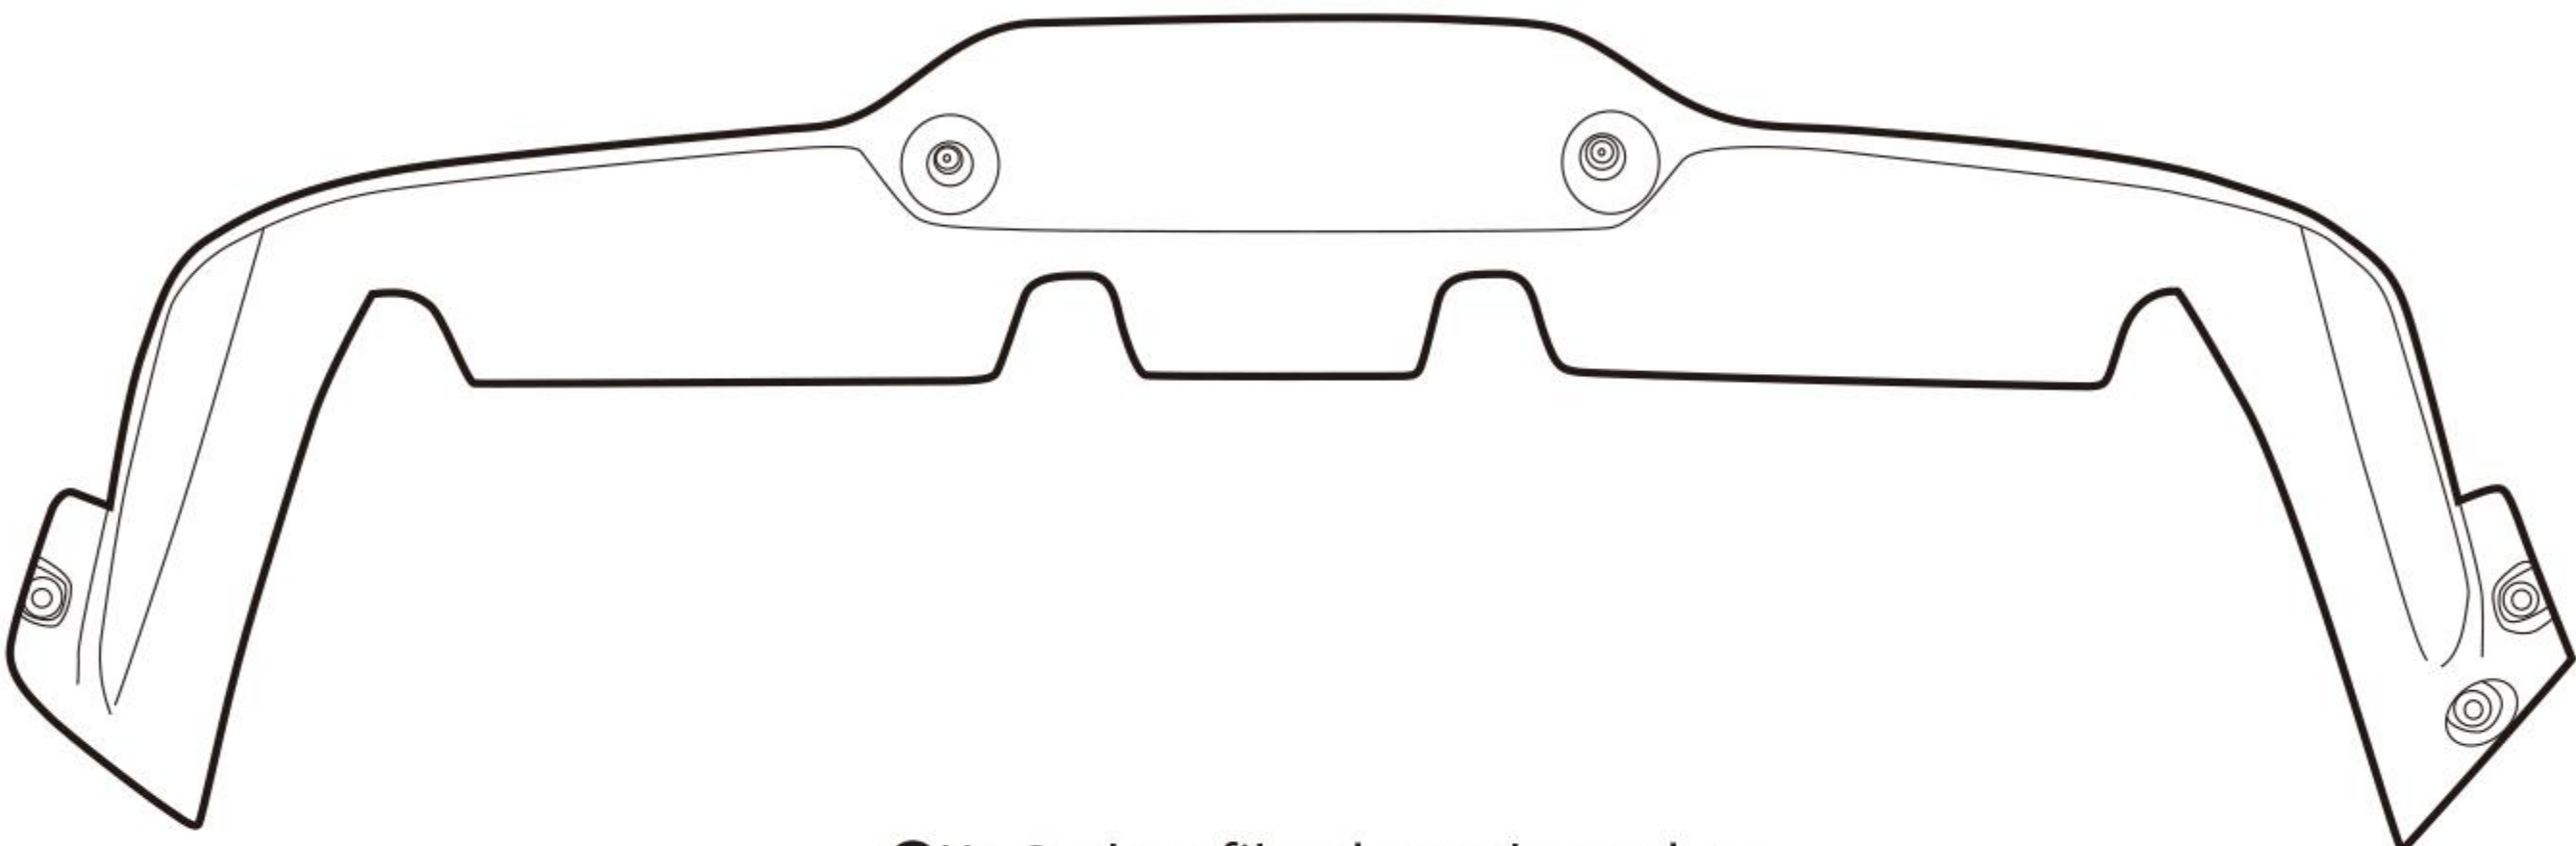

❷X1 Carbon fiber lower baseplate

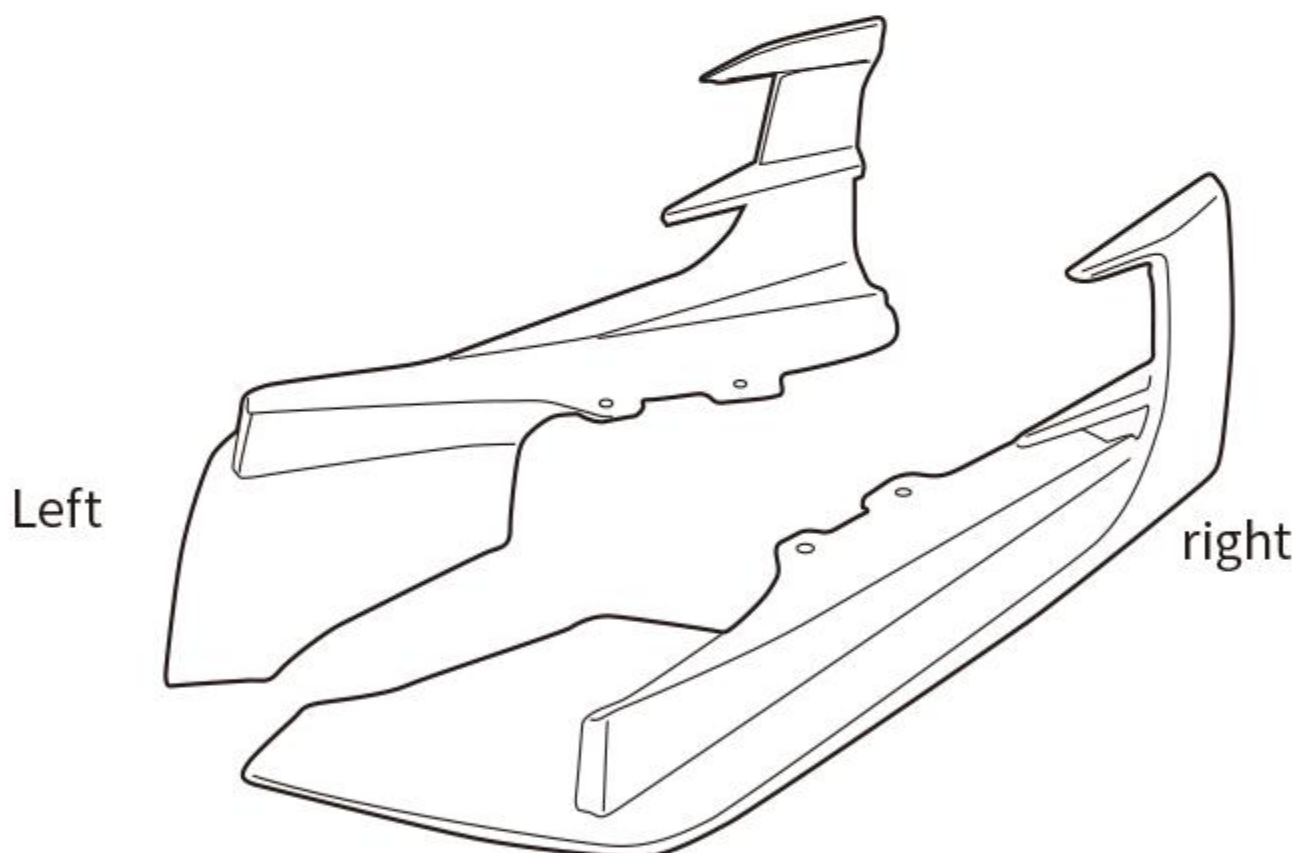


Left

right


❸X2 Left and right posterior lip wrapping angle

配件清单 Accessories list	
 Original car screws	 3M glue/A-s sealant


Step 1: Disassemble the rear lip of the original car.

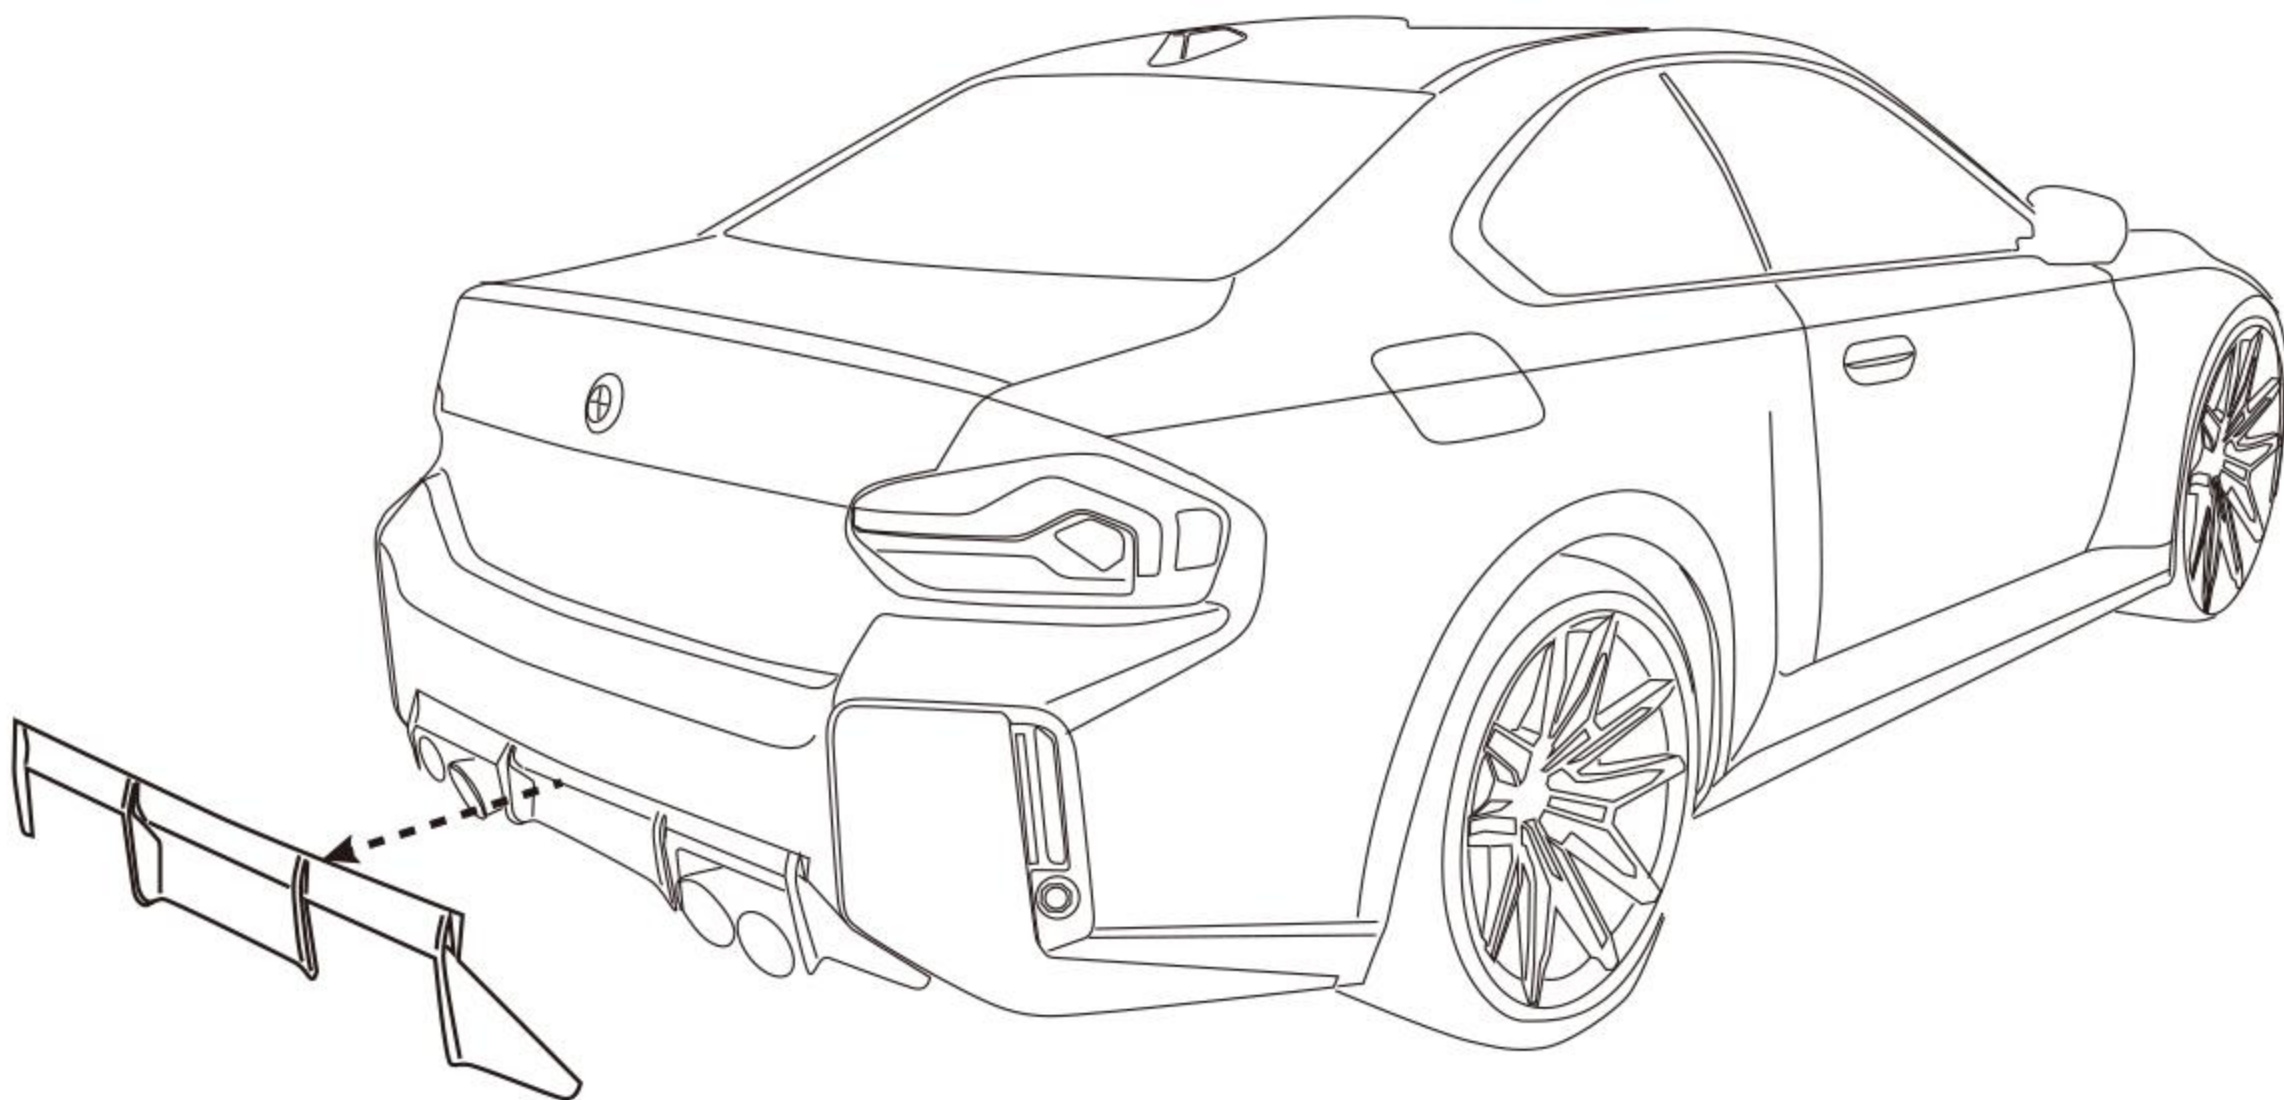



Step 2: Install the carbon fiber rear lip with the stock screws.

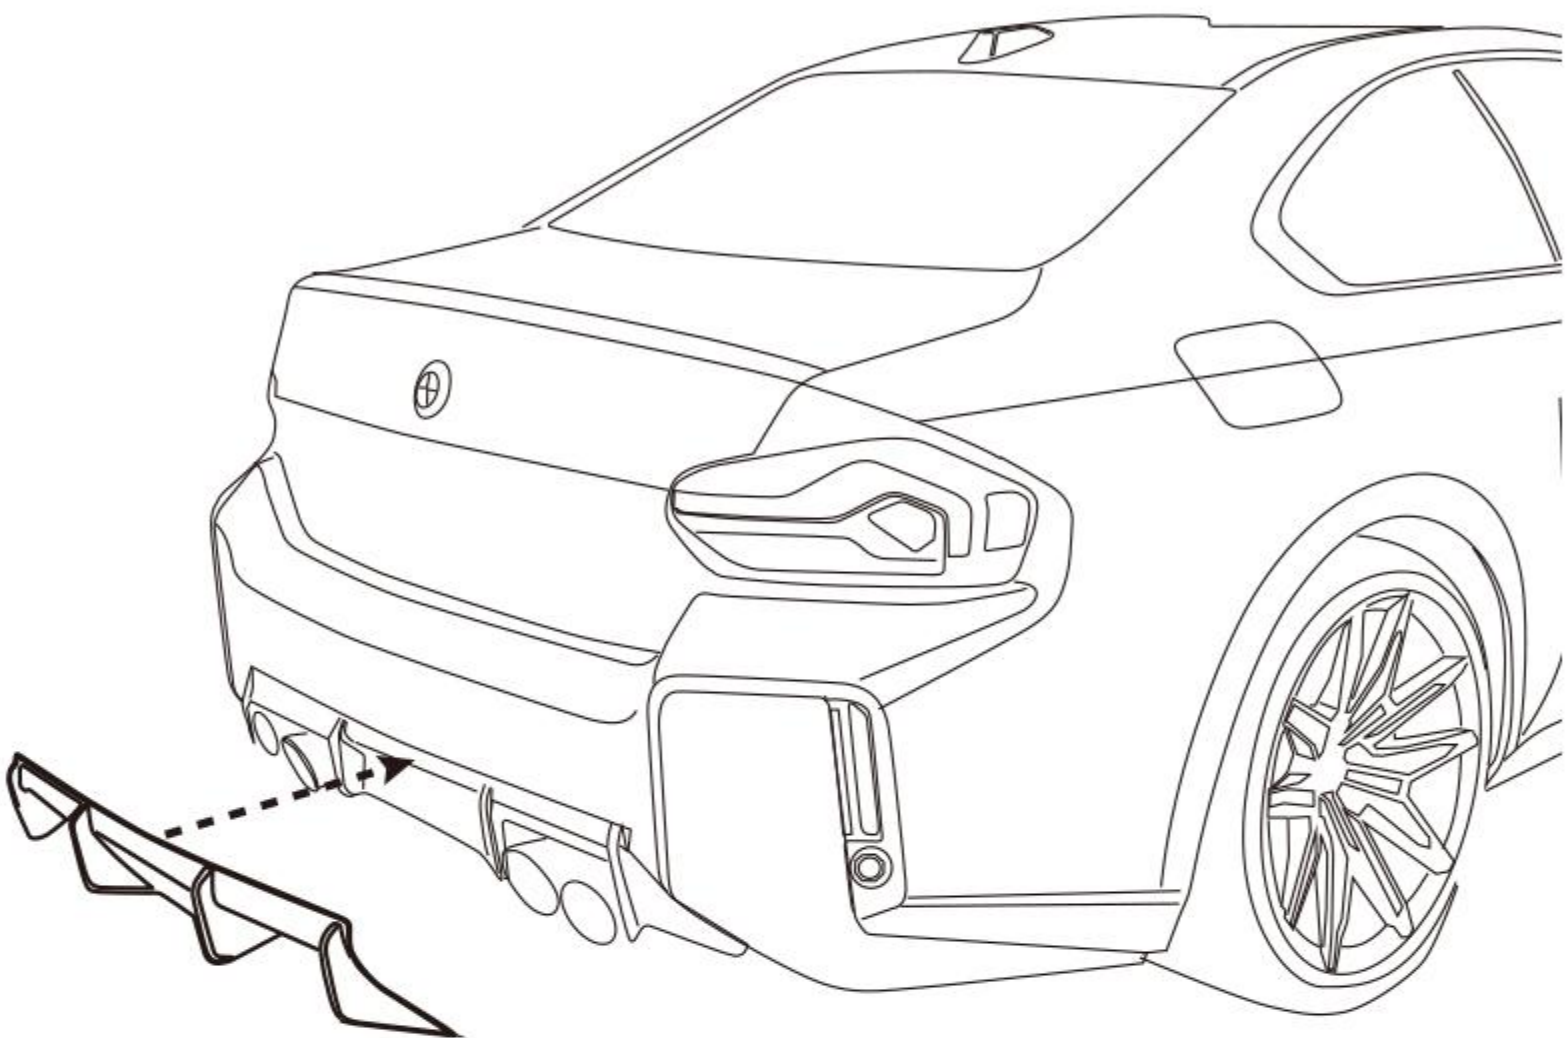

Step 2: Install the carbon fiber underbelly with the stock screws.

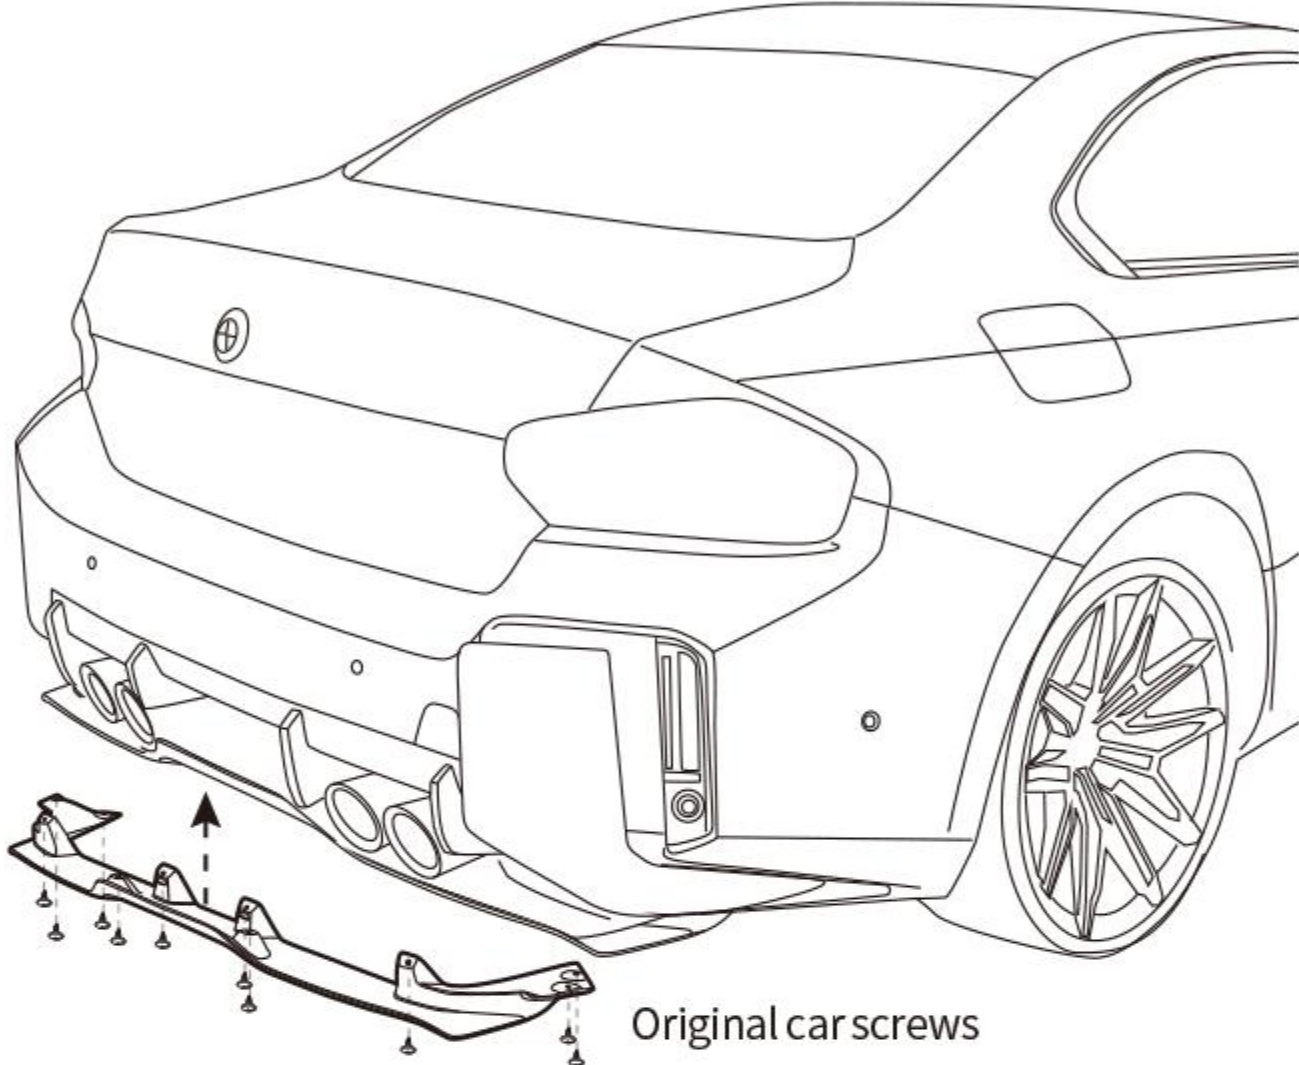

Step 4: Install the left and right corners. (fixed with glass glue + bottom screw)

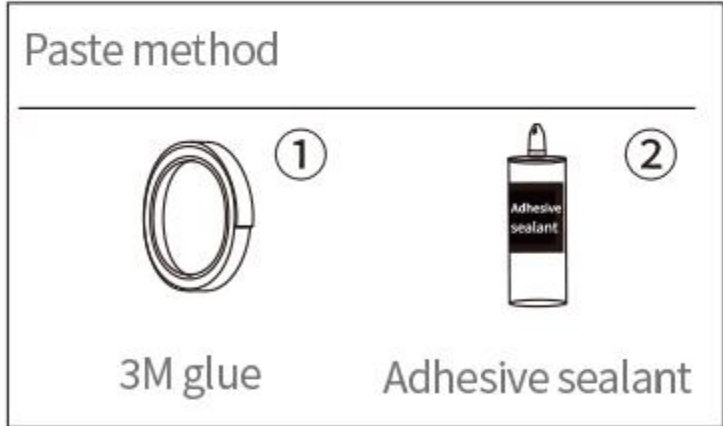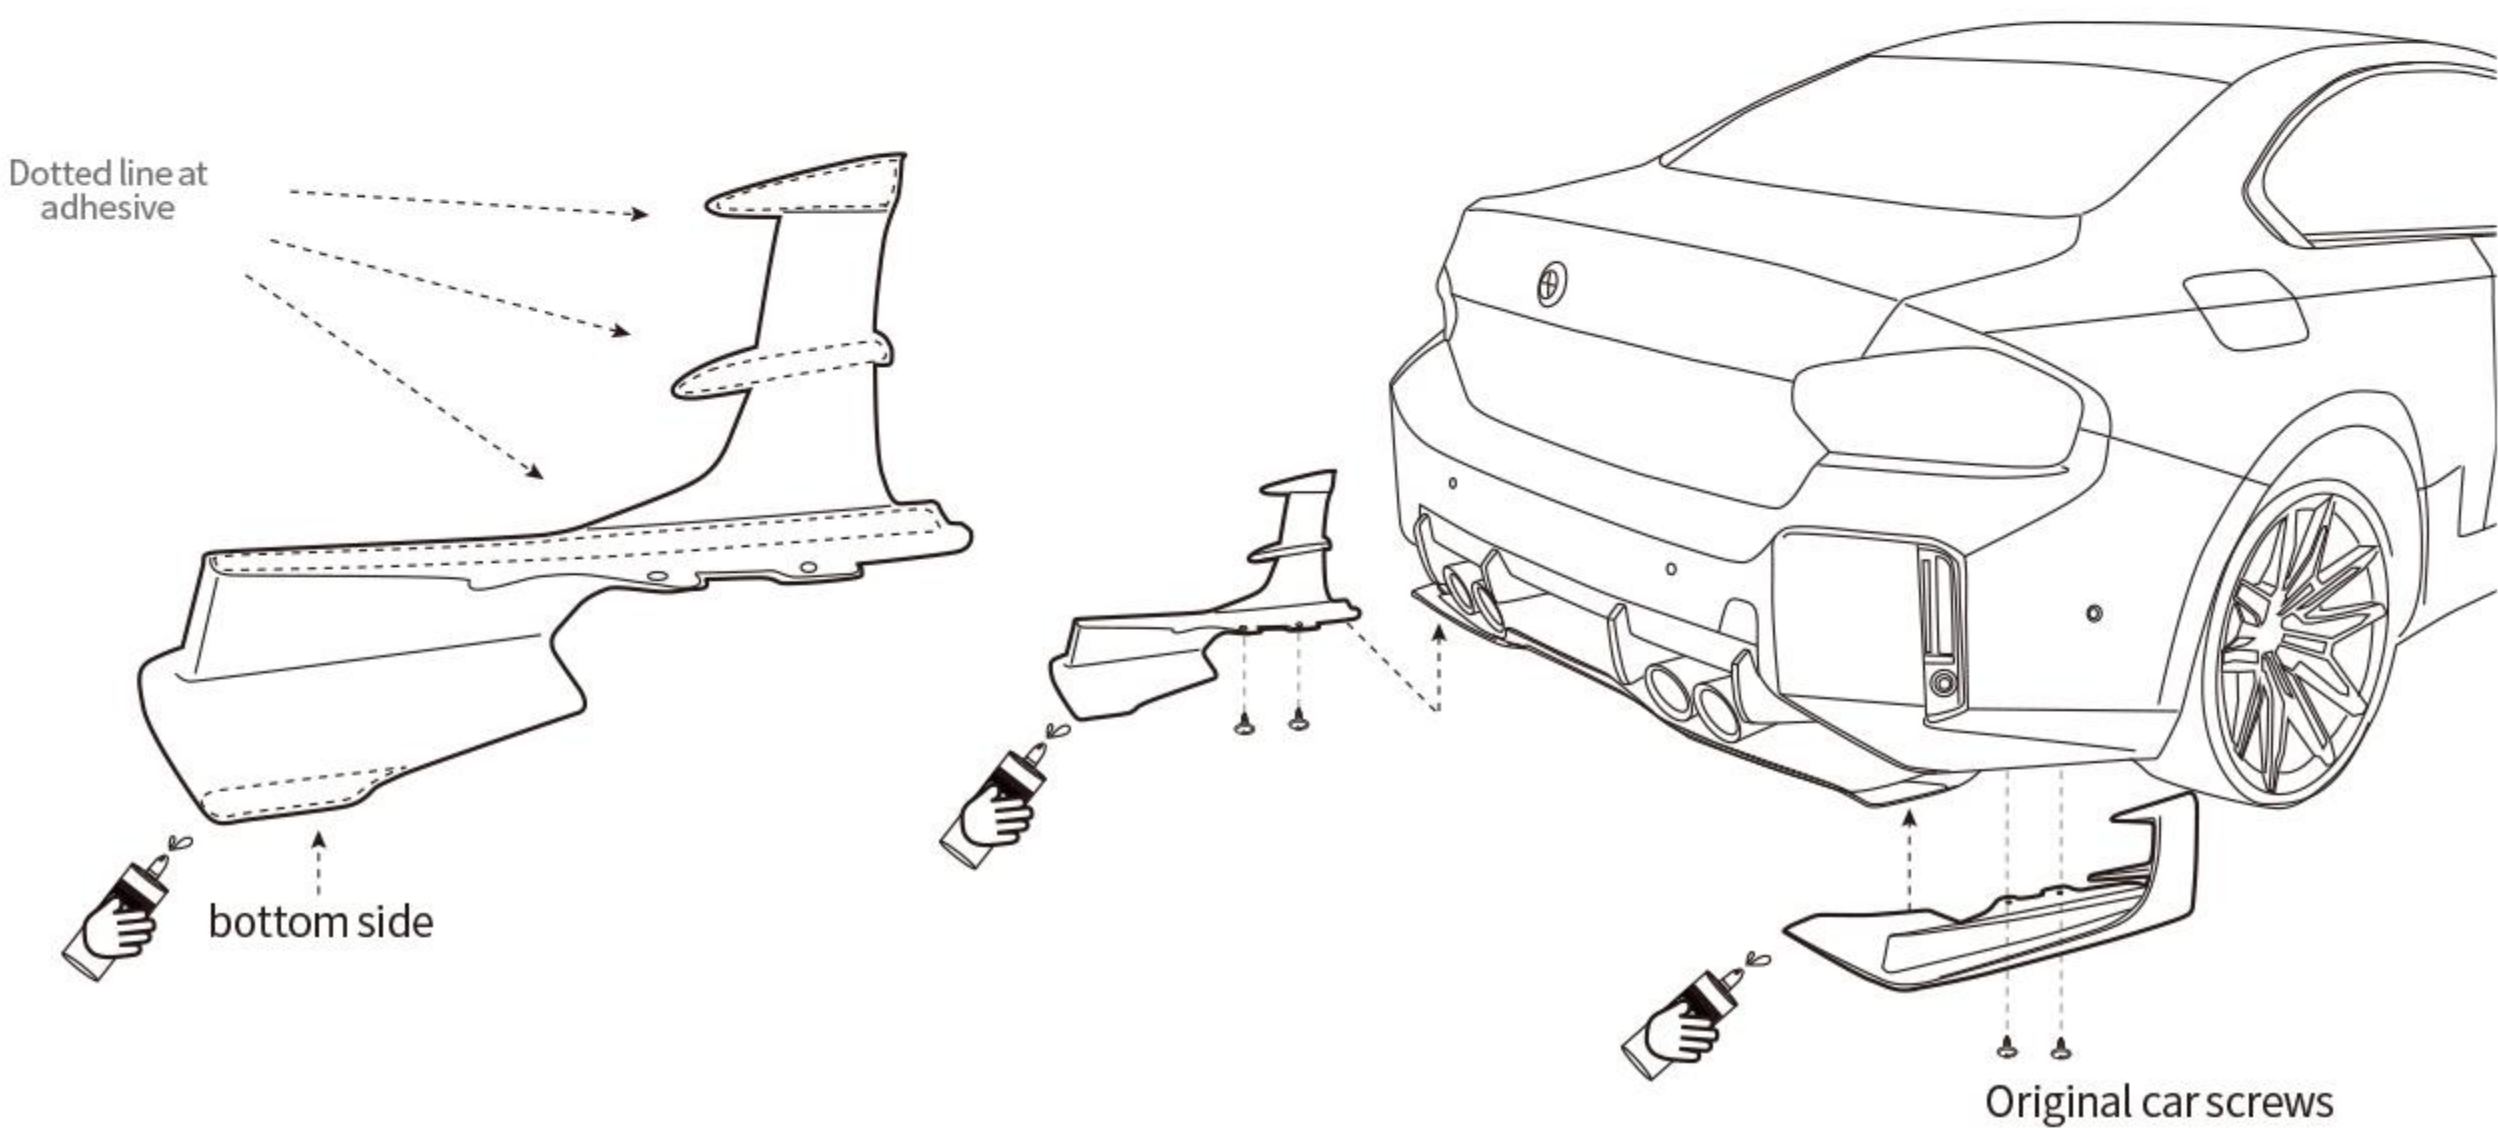

(Note: First clean the contact surface between the car body and the patch)

